

# Water Banking - A Practical Guide to Using Artificial Groundwater Recharge

## Artificial Groundwater Recharge



November 2010

Title:	Water Banking: A practical guide to using artificial groundwater recharge
Author:	Ricky Murray <i>Groundwater Africa</i> Jonny Harris <i>Maluti GSM</i>
Layout and design:	DTP Solutions
Project Name:	Strategy and Guideline Development for National Groundwater Planning Requirements
DWA Contract Number:	WP 9390
Status of Report:	Final

**Published by:**

Department of Water Affairs  
Private Bag X313 Pretoria 0001 Republic of South Africa  
Tel: (012) 336-7500

**Copyright reserved**

No part of the publication may be reproduced in any manner without full acknowledgement of the source

**This report should be cited as:**

Department of Water Affairs, 2010. Strategy and Guideline Development for National Groundwater Planning Requirements. Water Banking: A practical guide to using Artificial Groundwater Recharge, dated November 2010.

**Disclaimer:**

Although the information contained in this document is presented in good faith and believed to be correct, the Department of Water Affairs makes no representations or warranties as to the completeness or accuracy of the information, which is only based on actual information received, and makes no commitment to update or correct information.

**Professional Service Providers:**



203 Witch-Hazel Avenue  
Highveld Technopark  
0157



Pentagon House  
Cnr Cliffendale & Plettenberg Road  
Faerie Glen



54 Irene Avenue  
Somerset West  
7130




Unit 126 Phase 4  
Midrand Business Park



# Water Banking - A Practical Guide to Using Artificial Groundwater Recharge

## Contents

<b>1. INTRODUCTION</b>	<b>2</b>
<b>2. BENEFITS OF SUB-SURFACE STORAGE</b>	<b>3</b>
<b>3. APPROPRIATE APPLICATIONS</b>	<b>3</b>
Introduction	3
Artificial Recharge Areas	3
Water Source	6
Aquifer Hydraulics	6
Scheme Selection	7
<b>4. RECHARGE OPTIONS</b>	<b>8</b>
Aquifer Storage and Recovery (ASR)	9
Aquifer Storage Transfer & Recovery (ASTR)	10
ASR & ASTR Combined	11
Dune Filtration	12
Infiltration Basins	13
Local Rainwater Harvesting	15
Sand Dam	16
Percolation Tank	17
<b>5. ARTIFICIAL RECHARGE SUCCESS CRITERIA</b>	<b>18</b>
<b>6. SOUTH AFRICAN ARTIFICIAL RECHARGE RESOURCES</b>	<b>19</b>
<b>7. ACKNOWLEDGEMENTS</b>	<b>23</b>
<b>8. REFERENCES</b>	<b>23</b>

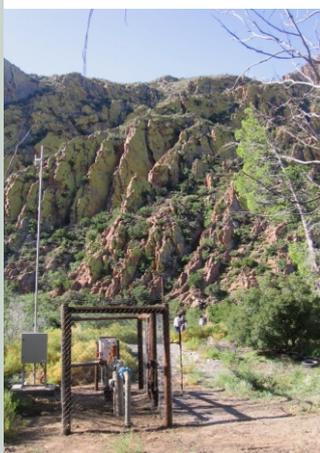

## 1. INTRODUCTION

In the past four years there have been many significant and exciting developments in the field of artificial recharge.

Water banking is the process of storing surplus water to help maintain sufficient water for our needs, to be drawn on when demand requires. Artificial recharge can be defined as the process whereby surface water is transferred underground to be stored in an aquifer. The most common methods used involve injecting water into boreholes or transferring water into spreading basins where it infiltrates the subsurface. Underground water storage is an efficient way to store water because it is not vulnerable to evaporation losses and it is relatively safe from contamination.

The Department of Water Affairs (DWA) published its artificial recharge strategy in June 2007 and in November of that year began implementing it. Potential artificial recharge areas have been identified for the whole country and a detailed artificial recharge assessment has been conducted in one Water Management Area – the Olifants/Doorn.WMA.

Some recent initiatives include:

- conducting feasibility studies for the towns of Plettenberg Bay and Prince Albert;
- transferring groundwater from one aquifer to another in Williston (western Karoo);
- conducting trial borehole injection tests in Langebaan;
- substantially increasing the artificial recharge and abstraction capacity in Windhoek by drilling new injection boreholes and deep abstraction boreholes;
- developing a website ([www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)) as South Africa's artificial recharge resource centre;
- developing university course material (presentation and notes) on artificial recharge, and
- writing up the history and operation of the Atlantis scheme near Cape Town.



The three main reasons for the recent interest in artificial recharge are:

- artificial recharge is usually far cheaper than conventional surface water schemes;
- new surface water sources are often not available, or increasing supply from existing surface water sources is not an option, because local surface water resources are already stressed, and
- there is no possibility for expanding existing groundwater supplies.

This booklet provides a practical guide for the appropriate application of artificial recharge in Southern Africa and is intended to assist the reader in the preliminary identification of potential artificial recharge options as method of achieving sustainable water management practices.

## 2. BENEFITS OF SUB-SURFACE STORAGE

Artificial recharge presents the opportunity for strategic water management for water stressed communities. This is particularly relevant to Southern Africa, where artificial recharge can provide a sustainable solution to managing the limited water resources. The proven benefits of existing sub-surface storage schemes are given below:

- The on-going enhancing of aquifer yields using treated waste water and storm water (Atlantis) and treated waste water only (Polokwane);
- Enhancing aquifer yields by transferring groundwater from one aquifer to another (Williston);
- Enhancing aquifer yields through opportunistic artificial recharge whenever surface water is available (Kharkams in Namaqualand and Omdel in Namibia);
- Enhancing the security of supply by large-scale sub-surface water banking from treated dam water for long-term and seasonal storage, and for emergency requirements (Windhoek), and
- Improving water quality (Atlantis and Kharkams).

See DWA (2010a) for more detailed information regarding the referenced schemes.

## 3. APPROPRIATE APPLICATIONS

### Introduction

Where water demand exceeds the availability of existing surface water and groundwater resources, artificial recharge may present the means to bank surplus water times of plenty for subsequent extraction. The identification of potential artificial recharge schemes is fundamentally driven by two main factors, namely; the presence of a suitable aquifer, and the availability of a suitable water source. Where there is no suitable aquifer, it may be possible to create an "aquifer" in the form of a sand dam. The artificial recharge selection procedure is discussed below.

### Artificial Recharge Areas

Artificial recharge schemes and favourable aquifers usually emerge after it becomes apparent that groundwater levels have dropped over time as a result of pumping; or additional storage is required and sub-surface storage is the cheapest large-scale reservoir option. However, it can also be advantageous to plan a groundwater scheme that incorporates artificial recharge from the outset, and to pro-actively identify areas where artificial recharge opportunities exist. With this in mind, a nationwide assessment of potential artificial recharge areas was conducted as part of the roll-out of DWA's artificial recharge strategy (see DWA 2009b). Favourable artificial recharge areas were identified as those areas which have known high aquifer permeability (see the map of South Africa overleaf). Potential artificial recharge area maps have been made for each Water Management Area (WMA). These can be downloaded from the DWA artificial recharge website: [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za).




20°E

25°S

30°S


- LEGEND**
- Major towns
  - National Route
  - Rivers by stream order
    - 3
    - 4
    - 5
    - 6
    - 7
  - Dry/non-perennial rivers
  - Pipelines
  - Tunnels
  - Canals
  - Dams
  - WMA boundaries
  - Provincial boundaries
  - Areas of AR potential
    - Intergranular 0.5 - 2.0 l/s
    - Intergranular > 2.0 l/s
    - Weathered and Fractured 2.0 - 5.0 l/s
    - Weathered and Fractured 5.0 - 10.0 l/s
    - Weathered and Fractured > 10 l/s
  - Mean Annual rainfall (mm/a)
    - 1 - 300
    - 300 - 600
    - 600 - 900
    - >900

# POTENTIAL ARTIFICIAL RECHARGE AREAS

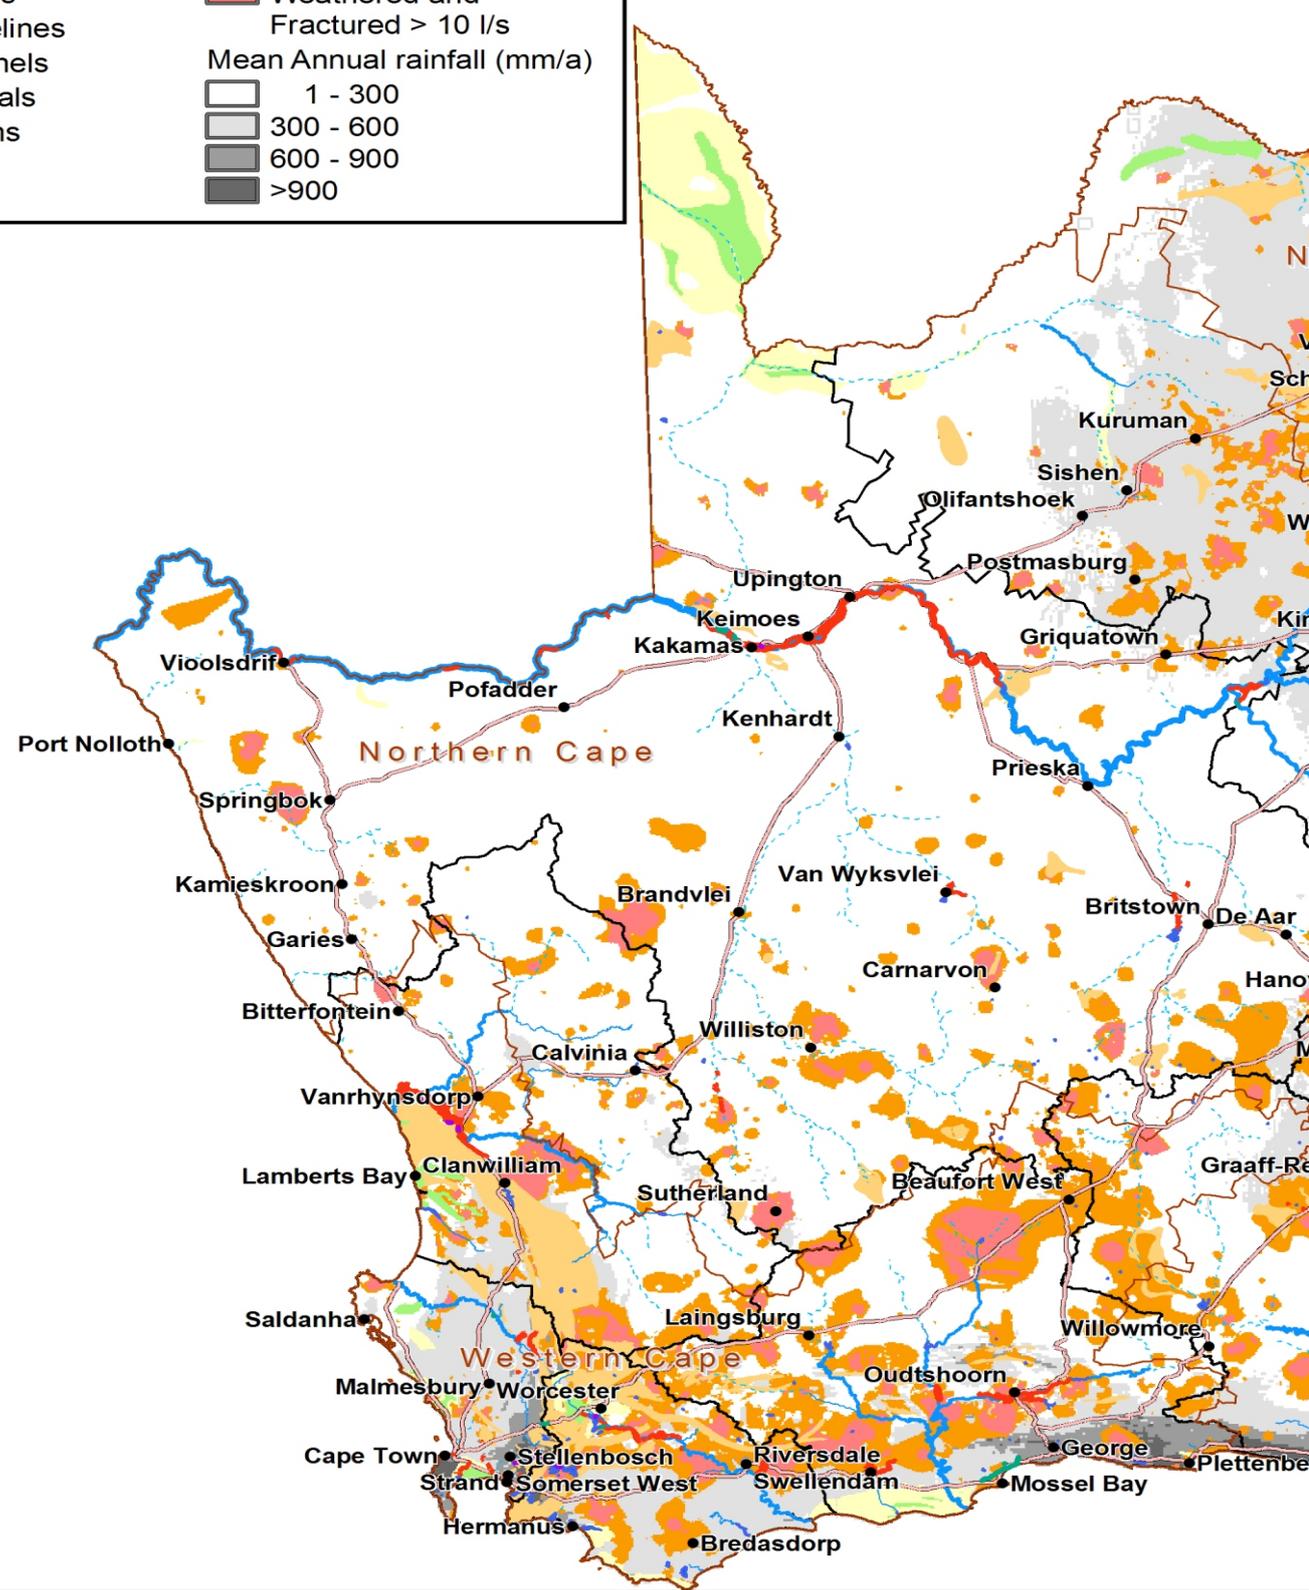

15°E

20°E

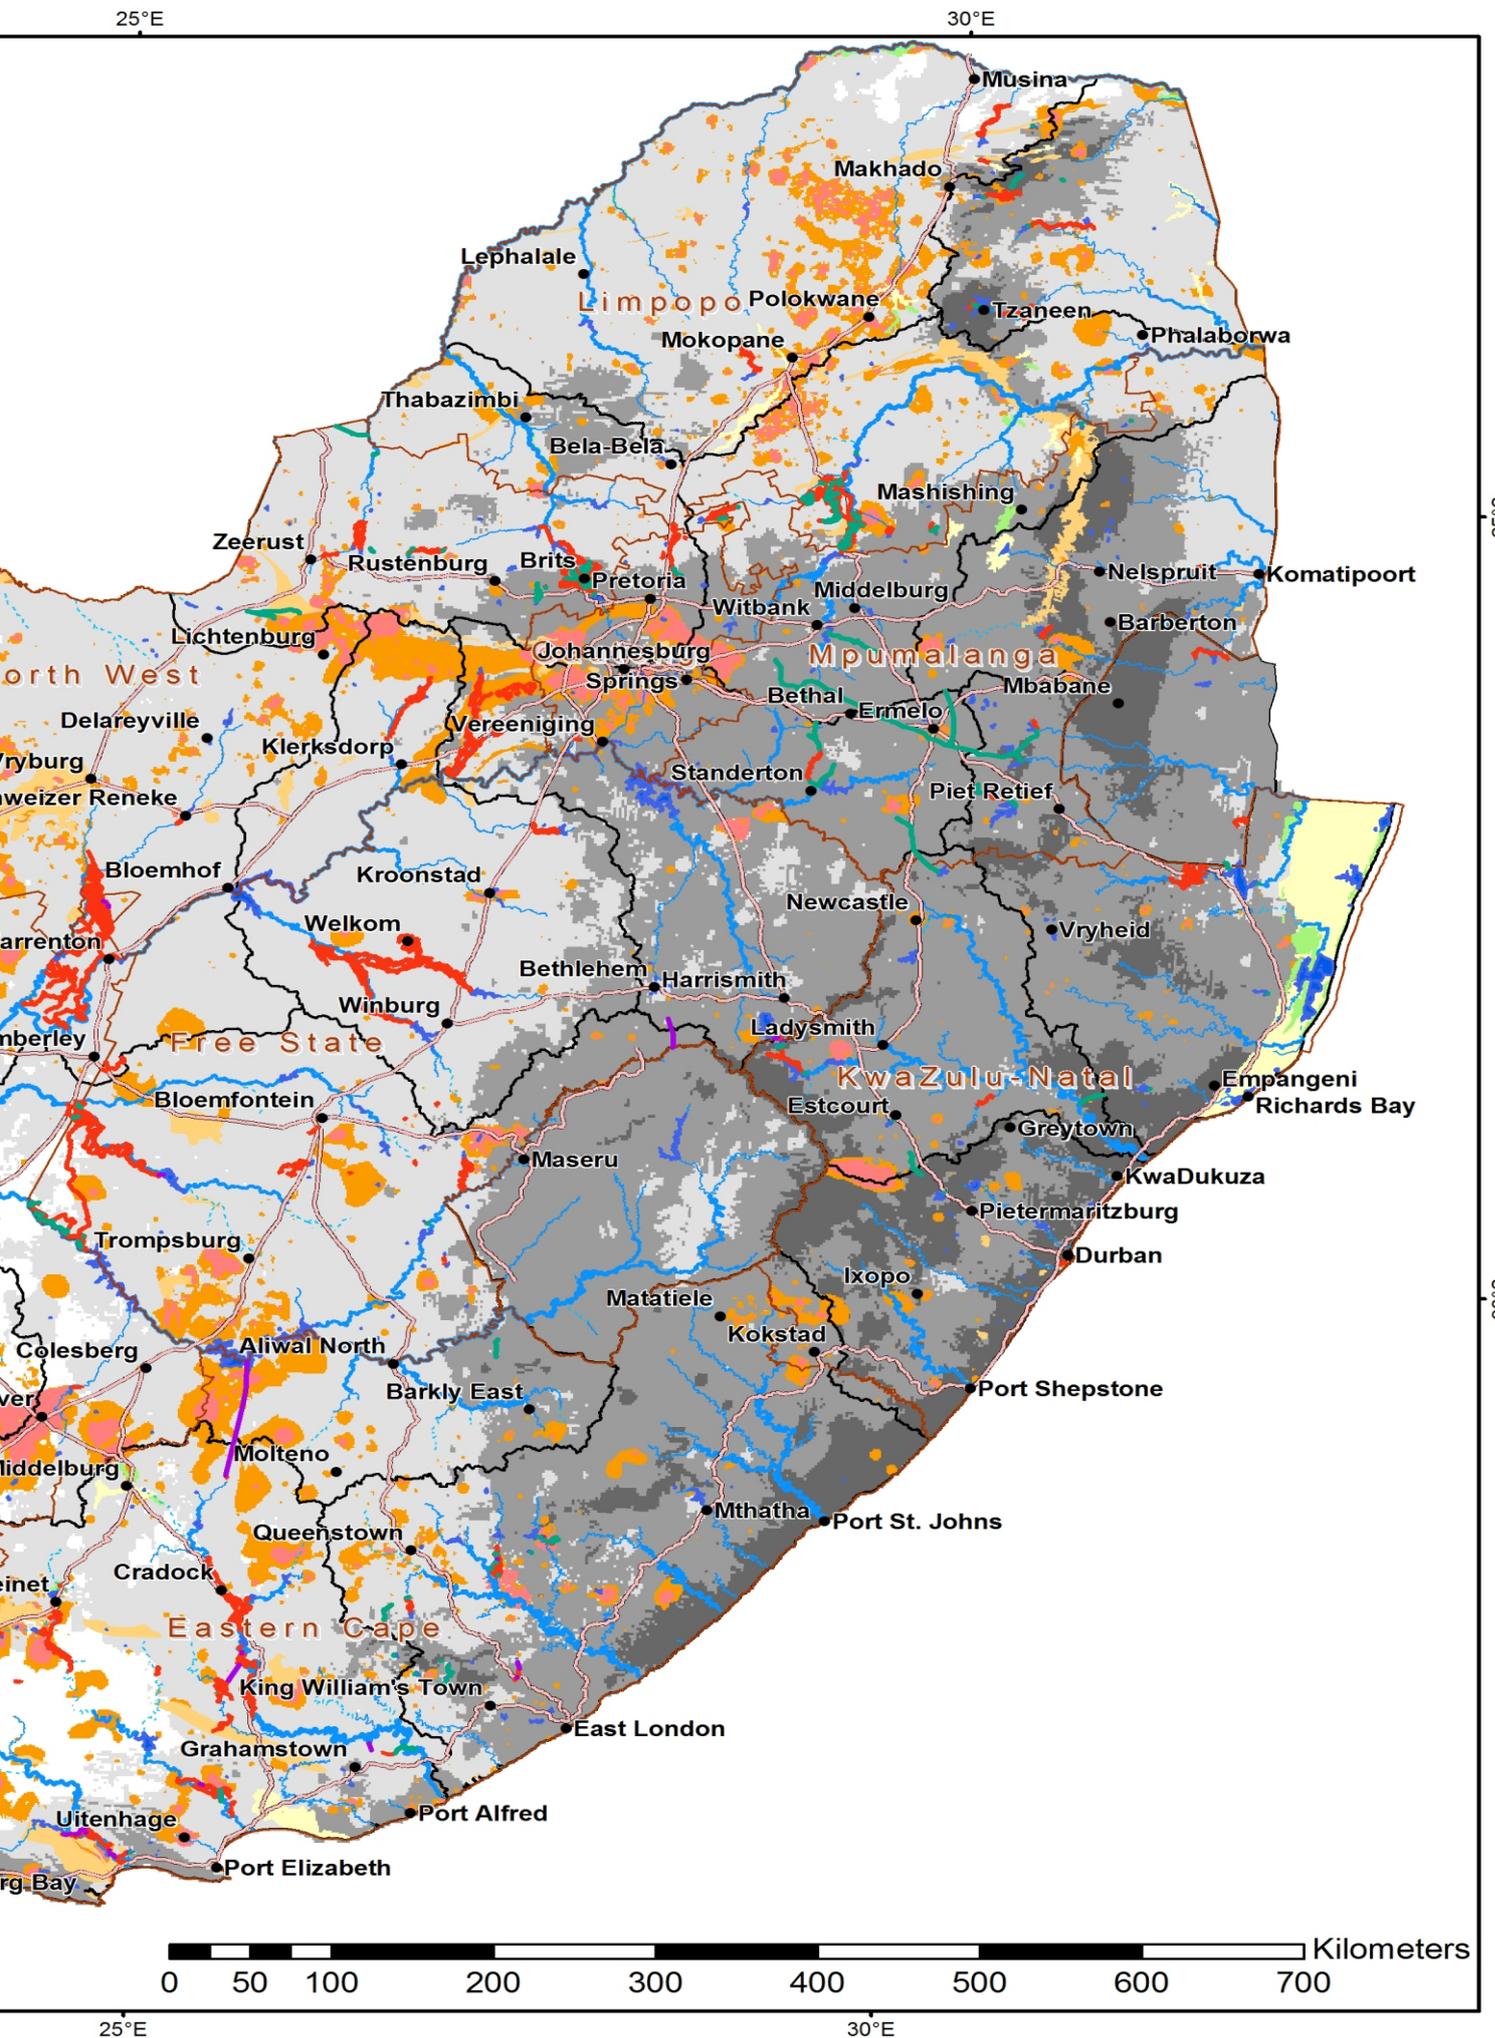

## Water Source

The availability of surplus water is essential to provide a source of water for aquifer recharge. This water may be in the form of rivers, dams, treated effluent, urban run-off and rainwater harvesting. The physical property of the different water sources will influence the design of the artificial recharge scheme.

*Water sources for artificial recharge*


Source water	Quantity	Reliability	Quality
Perennial Rivers	Variable	Variable	Variable
Ephemeral Streams	Variable	Variable	Variable
Dams	Variable	High	Low - High
Treated municipal waste water	Consistent	High	Low - High
Aquifers (i.e. transfers from other sub-surface reservoirs)	Consistent	High	Consistent
Urban stormwater runoff	Variable	Variable	Variable
Run-off from roofs and driveways	Variable	Variable	High
Agricultural return flows	Variable	High	Low

## Aquifer Hydraulics

The potential artificial recharge areas presented in the map of South Africa identify aquifers which are expected to have suitable hydraulic properties for the purpose of artificial recharge. Local variations in the hydrogeology may impact on the suitability of a particular aquifer. Where potential aquifers have been identified a hydrogeologist should evaluate the storage capacity and hydraulic conductivity of the aquifer. This information will inform the suitability of the aquifer for artificial recharge as illustrated below.




*Hydraulic Conductivity*

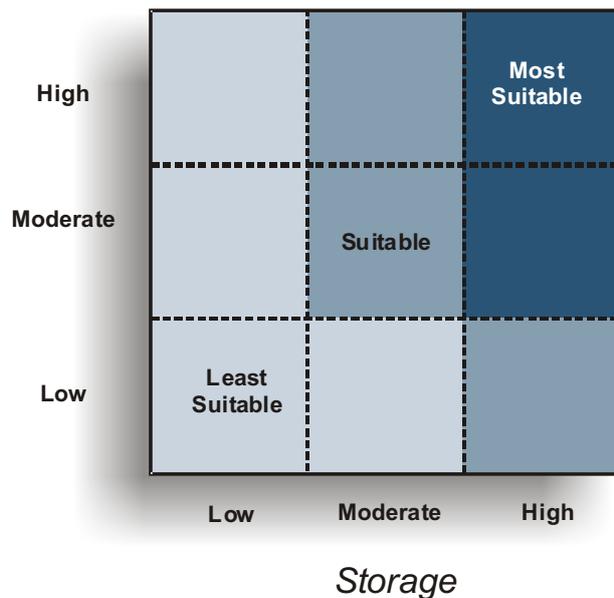

*Suitability of an aquifer to receive artificially recharged water (Murray and Tredoux, 1998)*

## Scheme Selection


The flow chart below is intended to guide the selection of potential artificial recharge methods. Examples of each method are presented in the following section.

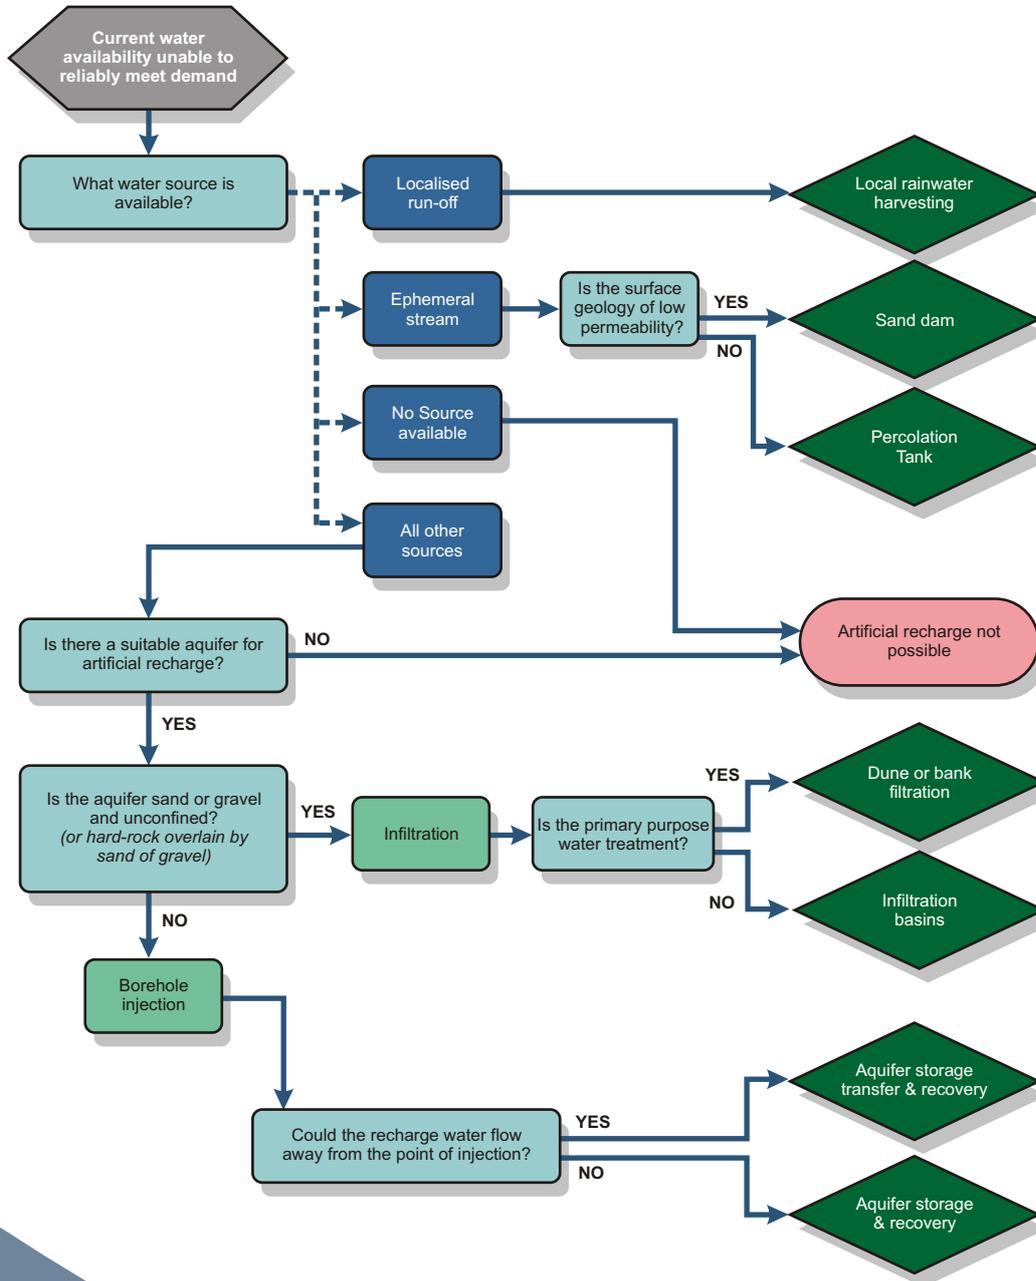

Flow chart to identify artificial recharge method


## 4. RECHARGE OPTIONS

The different artificial recharge methods are presented below together with case studies. The location of the case studies are shown on the map below.

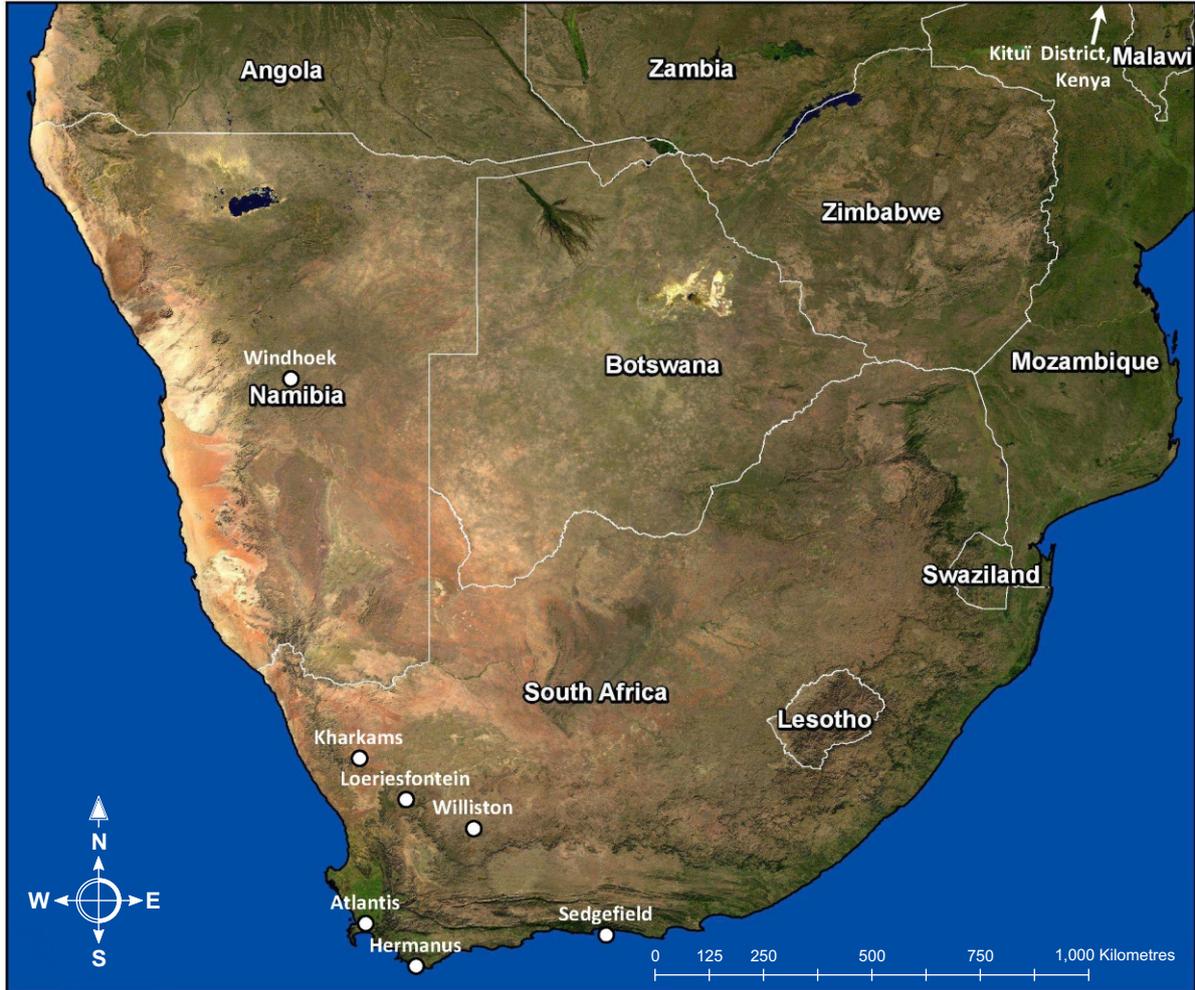

*Case Study Locations*





## Aquifer Storage and Recovery (ASR)

*The injection of water into a borehole for storage and recovery from the same borehole*

---

<b>Hydrogeological Conditions</b>	Suitable in both confined and unconfined aquifers. Optimal in areas where groundwater has a shallow hydraulic gradient.
<b>Typical Scale</b>	Village / Town ( $10^4$ - $10^6$ m <sup>3</sup> per annum)
<b>Relative Cost</b>	Low to Moderate ( <i>can be retrofitted to existing boreholes</i> )
<b>Treatment</b>	Usually high. Sediment load and debris must be removed to minimise borehole clogging.
<b>Other Considerations</b>	Requires abstraction and recharge pipe and fittings in the same borehole.

---

## CASE STUDY


### ***Kharkams, Namaqualand***

<b>Background</b>	Kharkams is a small village in the semi-arid Namaqualand region that depends solely on groundwater.
<b>Purpose</b>	Increase yield and reduce salinity of groundwater
<b>Water Source</b>	Surface water run-off
<b>Treatment</b>	Sand filtration
<b>Target Aquifer</b>	Fractured granite
<b>Typical Yield</b>	Yield increased by three times. Salinity reduced from undrinkable (EC = 300mS/m) to good quality potable water (EC < 100mS/m).
<b>Challenges / Lessons</b>	Poor maintenance of the sand filter has reduced the operational efficiency.

---



*Sand filter with injection and abstraction borehole (pump house) in the background*

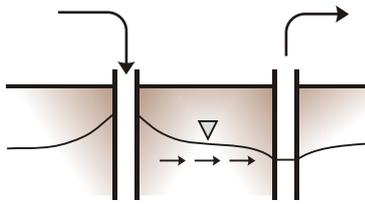

## Aquifer Storage Transfer & Recovery (ASTR)


*The injection of water into a borehole for storage and recovery from a different borehole*

<b>Hydrogeological Conditions</b>	Suitable in both confined and unconfined aquifers
<b>Typical Scale</b>	Village / Town ( $10^4 - 10^6$ m <sup>3</sup> per annum)
<b>Relative Cost</b>	Moderate to High ( <i>recharge up-gradient of existing boreholes</i> )
<b>Treatment</b>	Usually high. Sediment load and debris must be removed to minimise borehole clogging. Transfer process can improve the quality of the recharge water.


## CASE STUDY

### *Williston, western Karoo*


<b>Background</b>	This small town relies on groundwater for its domestic supplies. Abstraction over the years has been in excess of natural recharge. The aquifer is divided by an impermeable barrier and the levels in the adjacent compartment have not shown the decline evident in the pumped compartment.
<b>Purpose</b>	To increase yield of existing production boreholes
<b>Water Source</b>	Adjacent aquifer compartment
<b>Treatment</b>	None required
<b>Target Aquifer</b>	Fractured sandstones (dolerite sill intrusion in sedimentary rocks)
<b>Typical Yield</b>	260m <sup>3</sup> /day (effectively doubling the available yield)
<b>Challenges / Lessons</b>	Historic monitoring was essential to establish the groundwater levels in the two aquifer compartments.

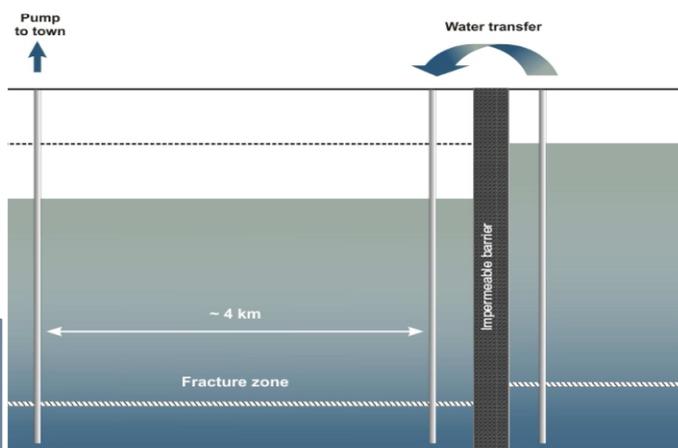

*Schematic diagram of Williston ASTR scheme*



ASR & ASTR Combined

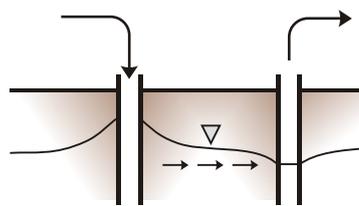

## CASE STUDY

### Windhoek, Namibia

#### Background

The Namibian capital Windhoek has a current water use of ~21 Mm<sup>3</sup>/ annum, most of which comes from three dams. The remainder is sourced from a groundwater and reclaimed water.

To improve water assurance, the city opted for artificial recharge over other options because it represented a significant cost saving with the same assurance of supply.

#### Purpose

To improve water security by 'banking' surface water underground, where evaporation and aquifer losses are negligible. To be able to supply virtually the entire city's current use when the aquifer is full, and then for it to be able to be rapidly and fully recharged afterwards.

#### Water Source

Surface water

#### Treatment

Full treatment to potable standards prior to injection

#### Target Aquifer

Fractured quartzite

#### Typical Yield

Sand filtration

#### Target Aquifer

Fractured granite

#### Typical Yield

Aquifer's sustainable yield: 1.7 Mm<sup>3</sup>/annum (without artificial recharge)

Current artificial recharge capacity: 2.8 Mm<sup>3</sup>/annum (5 injection boreholes)

Target artificial recharge capacity: 8 Mm<sup>3</sup>/annum (8 new injection boreholes have been drilled)

Current maximum yield: 11Mm<sup>3</sup>/annum (with artificial recharge)

Target yield: 19 Mm<sup>3</sup>/annum (with artificial recharge)

#### Challenges / Lessons


Artificial Recharge can be the most cost-effective option for enhancing a city's water security and supply system.

Complex, fractured aquifers can be used for artificial recharge provided detailed hydrogeological assessments are undertaken to understand the groundwater flow system.

Finalising agreements between the source water supplier (NamWater) and the scheme operator (City of Windhoek) delayed the initial operation of the scheme. Institutional agreements are commonly the greatest impediment to implementing artificial recharge schemes.



One of Windhoek's injection boreholes (below the tripod) and the water treatment building where further treatment is given through Granular Activated Carbon and chlorination

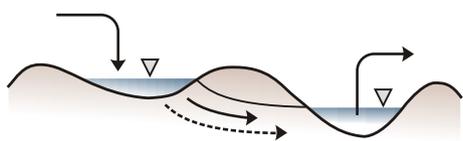

## Dune Filtration


*The infiltration of water through a sand dune and extraction from boreholes, wells or ponds at a lower elevation for water quality improvement and to balance supply and demand.*

<b>Hydrogeological Conditions</b>	Unconfined sedimentary aquifer (sand dune)
<b>Typical Scale</b>	Village / Town ( $10^4 - 10^6$ m <sup>3</sup> per annum)
<b>Relative Cost</b>	Low ( <i>only shallow wells / excavations required</i> )
<b>Treatment</b>	Minimal pre-treatment is usually required. Source water should be reasonably clear to avoid clogging. Dune infiltration is effective for the removal of sediments and micro-organisms.
<b>Other Considerations</b>	Requires water source near to dune system (commonly wastewater treatment works or stormwater outfalls). Residence time in the aquifer will determine how effective it is for removing micro-organisms.


## CASE STUDY

### *Sedgefield*

<b>Background</b>	This coastal town has a current water demand of 2000m <sup>3</sup> /day. Water is supplied from the Karatara River which is supplemented by groundwater and sea water desalination in the summer. Future demand is expected to increase to 4500m <sup>3</sup> /day.
<b>Purpose</b>	Increase water supply to meet future demand
<b>Water Source</b>	Treated effluent from Waste Water Treatment Works
<b>Treatment</b>	Natural polishing will occur in aquifer before abstraction
<b>Target Aquifer</b>	Sand
<b>Typical Yield</b>	Potential yield – 1300m <sup>3</sup> /day (and can increase as more water is treated at the Waste Water Treatment Works)
<b>Challenges / Lessons</b>	Project to be implemented. Post treatment requirements (eg chlorination) will only be known after abstraction boreholes have been drilled.

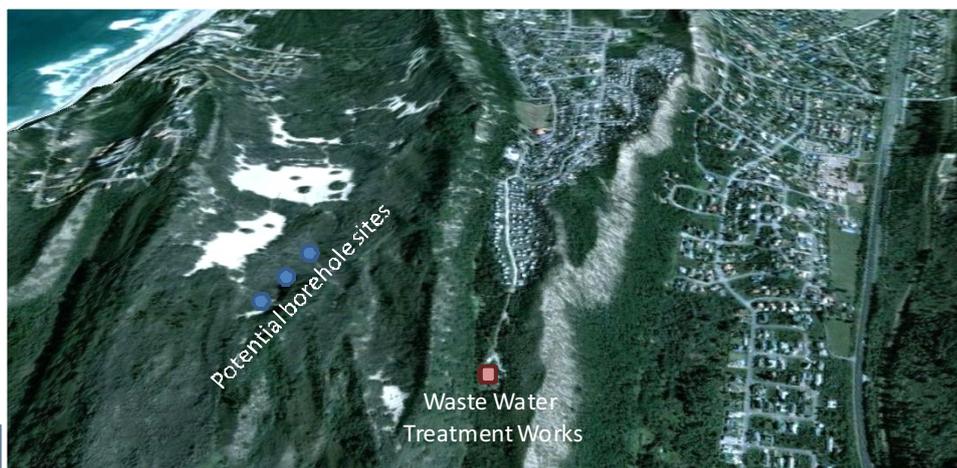

*Aerial photograph of Sedgefield WWTW in the sand dunes and proposed abstraction boreholes (Google Earth, 2010)*

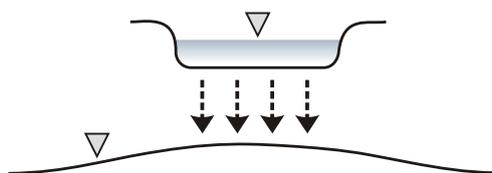

### Infiltration Basins

*Basins constructed in sand or gravel aquifers. Surface water is diverted to the basins and allowed to infiltrate through an unsaturated zone to the underlying unconfined aquifer.*

<b>Hydrogeological Conditions</b>	Sandy unconfined aquifers. This method is not suited to clayey soils
<b>Typical Scale</b>	Village / Town ( $10^4 - 10^6 \text{ m}^3$ per annum)
<b>Relative Cost</b>	Moderate ( <i>can recharge up-gradient of existing boreholes</i> )
<b>Treatment</b>	Infiltration is more rapid with clean water than turbid water, and the cleaner the water the longer the infiltration “runs” before having to scrape the basin to remove fine material. Natural treatment is provided by filtration through the unsaturated zone.
<b>Other Considerations</b>	The water table should be at least a few metres below ground level. Residence time in the aquifer will determine how effective it is for removing micro-organisms.

### CASE STUDY

#### **Atlantis**

<b>Background</b>	Atlantis is 50 km north of the Cape Town and has a population in excess of 60 000. The artificial recharge scheme is operated by the City of Cape Town and has successfully recharged and recycled treated waste water and storm water for three decades. The recycled water is used for domestic supplies. In addition to the recharge scheme, treated industrial waste water is diverted to coastal basins to provide a subsurface barrier to contain the recharge water and prevent ingress of saline water.
<b>Purpose</b>	To enhance groundwater yields and deal with industrial wastewater
<b>Water Source</b>	Treated domestic waste water and storm water runoff
<b>Treatment</b>	Domestic waste water and “clean” industrial waste water is treated prior to infiltration, and urban runoff is allowed to settle prior to being fed to the recharge basins. The poorer quality industrial waste water is treated prior to being used as a barrier between the relatively clean recharge water and saline water.
<b>Target Aquifer</b>	Sandy with a saturated thickness of up to ~35 m. It is underlain by an impermeable layer of weathered shale.
<b>Typical Yield</b>	$2.7 \times 10^6 \text{ m}^3$ /annum water recharged (approximately 30% of Atlantis' groundwater supply)



*The main infiltration basin, Basin 7*

## CASE STUDY

### *Atlantis (continued)*

The Atlantis Water Resource Management Scheme has proven itself as an innovative and highly successful scheme. It has shown that that it is possible to separate different types of wastewater and storm water and manage them all. The performance of the water recycling system has shown itself to be robust with respect to the elimination of contaminants.

A monitoring system has been in place since project inception. This needs to be continuously upgraded to improve the understanding, management and performance of the scheme.

#### Challenges / Lessons


An integrated scheme requires integrated management to ensure optimal efficiency of the scheme. This is a challenge as different responsibilities currently rest with three separate departments in the City of Cape Town.

Most of the infiltration is via one basin. This limits the scheme's infiltration and attenuation capacity. By redesigning the basin into a number of sub-basins, it would allow for alternate wetting and drying cycles. This would allow for regular scraping of the basins to increase infiltration efficiencies, and it would increase the thickness of the unsaturated zone which would improve the attenuation capacity.


Regular litter and sediment removal is required to optimise the efficiency of the scheme.



*Aerial photo of Basin 7*

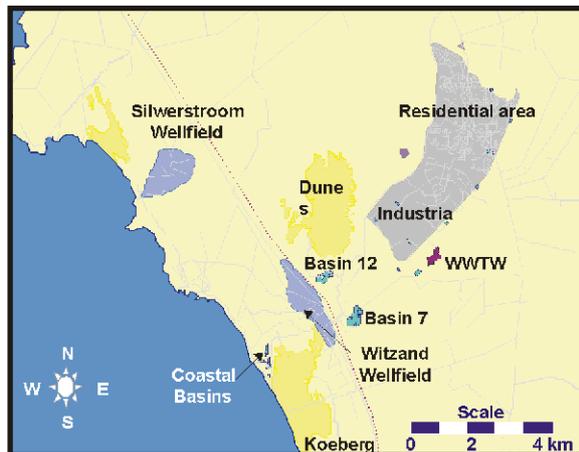

*Basin location plan*

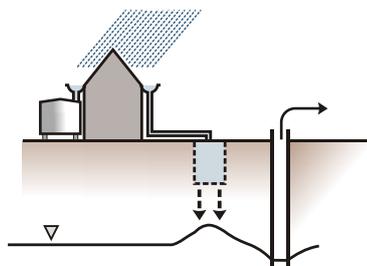

## Local Rainwater Harvesting

Surface water runoff from roofs or localised paving is diverted into a borehole, well or a soakaway filled with sand or gravel and allowed to percolate to the water table where it is collected by pumping from wellpoints, wells or boreholes.

### Hydrogeological Conditions

Sandy aquifers: Wells, soakaways or boreholes  
Hard-rock aquifers: Boreholes

### Typical Scale

Family / Village ( $10^2 - 10^3$  m<sup>3</sup> per annum)

### Relative Cost

Low to Moderate, (can be retrofitted to existing boreholes)

### Pre-Treatment

Not usually required, first few millimetres of rain can be diverted away from infiltration to flush debris collected on the roof. Storm runoff can be diverted to reed beds prior to artificial recharge. These “water features” linked to artificial recharge schemes are becoming increasingly popular as part of urban design.

### Other Considerations

Diverting roof water into the ground can be beneficial by offsetting the impact of urbanisation on the aquifer.

## CASE STUDY

### Hermanus

#### Background

Two out of every three houses in the suburbs of Northcliff and Eastcliff in Hermanus have well points. This places a sizable demand on the existing shallow groundwater source.

#### Purpose

Household rain water which falls onto roofs and hard surfaces can be captured and diverted into the aquifer rather than being lost to storm water drainage.

#### Water Source

Rainwater falling on local properties

#### Pre-Treatment

None

#### Target Aquifer

Shallow sands 5-10m thick with an average groundwater depth of 2.5m below ground level.

#### Typical Yield


Artificial recharge will help sustain yields sufficient to meet garden irrigation demands.

#### Challenges / Lessons

To raise awareness of the financial benefit of harvesting rainwater for household irrigation, rather than using clean municipal water.



Aerial photograph of Hermanus  
(Google Earth, 2010)

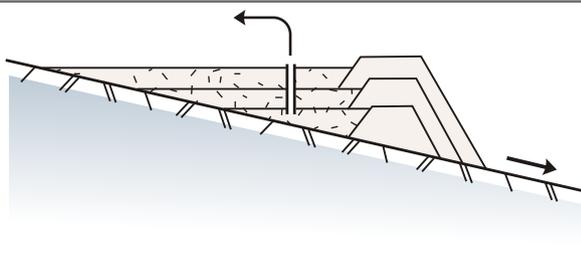

### Sand Dam

*Built in ephemeral streams in arid areas on low permeability lithology. They trap sediment when flow occurs and following successive floods, the sand dam is raised to create an "aquifer". Vertical boreholes or horizontal outlets to the face of the dam can be used to extract water in dry seasons.*

<b>Hydrogeological Conditions</b>	Low permeability surface geology
<b>Typical Scale</b>	Family / Village ( $10^3 - 10^4 \text{ m}^3$ per annum)
<b>Relative Cost</b>	Low to moderate, depends on size of dam
<b>Pre-Treatment</b>	Silt traps may be required to prevent surface clogging
<b>Other Considerations</b>	Generally not suitable where very fine sediment loads occur, however dam can be designed to trap the coarser sediment that occurs as bed load. Best in areas where the river flows over coarse sand such as granitic sands.


### CASE STUDY

**Kitui District, Kenya** (Borst & de Haas, 2006)

<b>Background</b>	Sand Dams have been constructed in the Kitui District for the last 25 years, constructed by communities with local materials.
<b>Purpose</b>	Domestic use, livestock and agriculture
<b>Water Source</b>	Ephemeral stream
<b>Pre-Treatment</b>	None, but stored water is protected from contamination
<b>Target Aquifer</b>	Series of Sand Dams, ranging between 2m - 4m high and 20m long
<b>Typical Yield</b>	$2000\text{m}^3$ (per dam)
<b>Challenges / Lessons</b>	Low maintenance requirements make the Sand Dam a sustainable technology for remote communities.



*Typical Sand Dam  
(Borst & de Haas, 2006)*

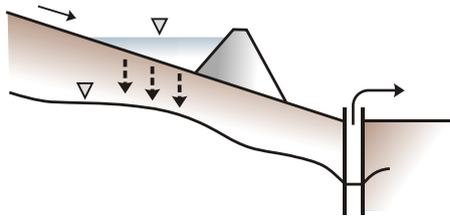

### Percolation Tank


Normally built in ephemeral streams, the percolation tank stores surface water allowing it to infiltrate into the underlying unconfined aquifers. The recharged water is then extracted down-gradient via wells or boreholes.

<b>Hydrogeological Conditions</b>	Unconfined aquifers
<b>Typical Scale</b>	Village / Town ( $10^4 - 10^5$ m <sup>3</sup> per annum)
<b>Relative Cost</b>	Low to Moderate, depending on size of dam
<b>Pre-Treatment</b>	Silt Traps may help to prevent surface clogging and siltation of the percolation tank.
<b>Other Considerations</b>	Effective where surface geology is permeable (ie in areas where the construction of a water-tight dam would require the importation of lining material).

## CASE STUDY

### Loeriesfontein, Northern Cape

<b>Background</b>	Loeriesfontein is a small town in the semi-arid Namakwa District. The average rainfall is less than 250 mm per year and the average evaporation is about 2200 mm per year. The town's water is from five production boreholes.
<b>Purpose</b>	Municipal water supply and irrigation.
<b>Water Source</b>	Ephemeral Stream
<b>Pre-Treatment</b>	None
<b>Target Aquifer</b>	Alluvium
<b>Typical Yield</b>	Recharge increases the productivity of the boreholes which yield approximately 0.15Ml/d.
<b>Challenges / Lessons</b>	Siltation will reduce the storage capacity and therefore the potential recharge volume. Sub-surface storage is preferable due to high evaporation.
<b>Replication Opportunities</b>	Widely used across South Africa and can be retrofitted to existing 'leaky' dams to harvest water lost to infiltration.

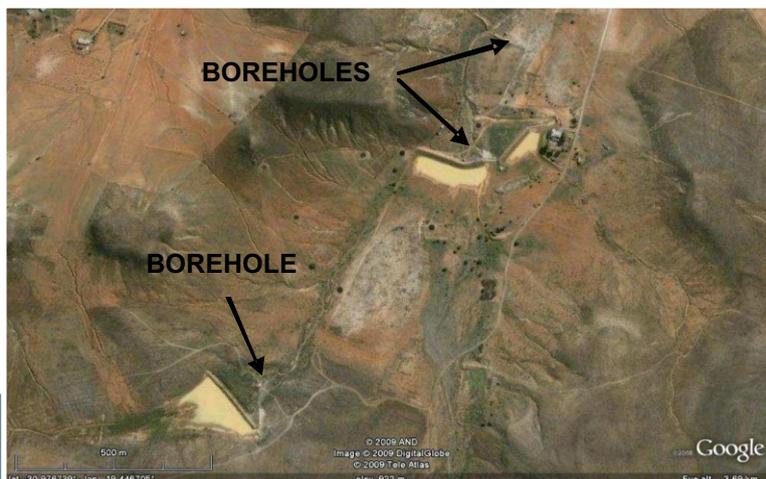

Loeriesfontein boreholes located below earth dam walls.

## 5. ARTIFICIAL RECHARGE SUCCESS CRITERIA

There is a range of important criteria to be assessed before undertaking an artificial recharge project. Many of these relate to the geology and hydrology of the area; some concern environmental impacts and others are about cost/benefit ratios and the appropriate scale and design of the scheme.

But even if all these criteria are correctly considered, all artificial recharge schemes, irrespective of size, will fail without proper monitoring and maintenance. The demands vary - the small Kharkams project only requires yearly scraping of the sand filter and cleaning of the in-line filters, whereas the more complex Atlantis scheme needs dedicated staff to operate it along with the treatment plant and other infrastructure - but the requirement for on-going maintenance is constant.

The department's Artificial Recharge Strategy (DWAF, 2007) outlines the ten key "success criteria" for artificial recharge. The top four of these criteria were discussed in Chapter 3 with reference to the selection of an appropriate application for artificial recharge; the latter criteria consider potential regulatory, financial and capacity constraints. The ten "success criteria" are summarised below:

- I. **The need for an artificial recharge scheme:** Is artificial recharge really necessary - could you not increase your groundwater yield by expanding the wellfield or by managing the existing wellfield better?
- II. **The source water:** What volume of water is available for recharge, and when is it available?
- III. **Aquifer hydraulics:** Will the aquifer receive and hold the water in storage?
- IV. **Water quality:** Is the quality of the source water suitable for artificial recharge?
- V. **Engineering issues:** How will the water be treated and transferred into the aquifer?
- VI. **Environmental issues:** What are the potential environmental benefits, risks and constraints?
- VII. **Legal and regulatory issues:** What type of authorisation is required?
- VIII. **Economics:** How much will the scheme cost, and what will the cost of supplied water per m<sup>3</sup> be?
- IX. **Management and technical capacity:** Are the skills available to operate the scheme?
- X. **Institutional arrangements:** Who will be responsible for supplying the source water and ensuring its quality is suitable; are there other users of the aquifer; who will regulate the use of the scheme?


More information about these criteria, the key questions for each project stage and a detailed check-list for implementing successful artificial recharge projects is available in DWAF (2007) and DWA (2009a).

## 6. SOUTH AFRICAN ARTIFICIAL RECHARGE RESOURCES


### DWA's artificial recharge website

[www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)


This website contains all the resources listed below, links to other relevant websites and more information on artificial recharge. All new resources developed under DWA's roll-out of the artificial recharge strategy have been posted on the website.

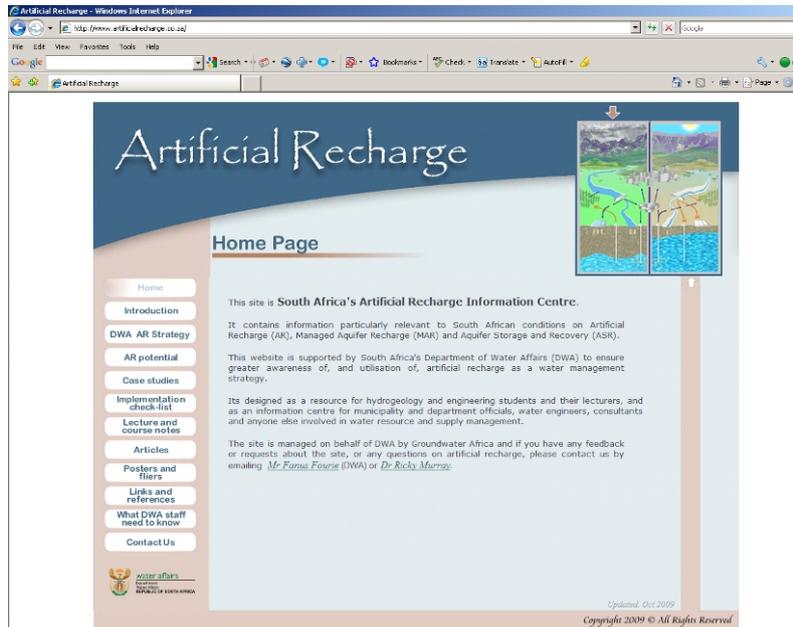


**Artificial Recharge Strategy: Version 1.3** (DWA, 2007): This document is mostly a handbook on artificial recharge. It contains a wealth of information, including the types of schemes, details on the “success criteria”, authorisation and regulatory issues and the Artificial Recharge Strategy.

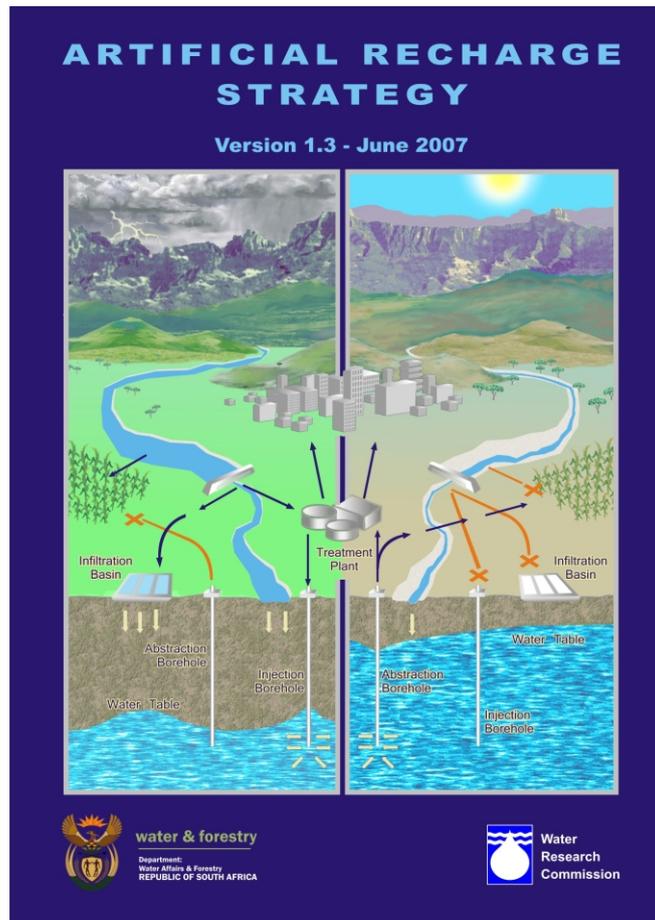


**Potential Artificial Recharge Areas in South Africa** (DWA, 2009b): This report identifies potential recharge areas, identifies a number of places where artificial recharge should be considered, describes conceptual plans for artificial recharge at a few sites, and gives an artificial recharge assessment of WMA 19. The methodology for the WMA 19 study is written up in detail and can be used as an example or template for other WMA-scale studie

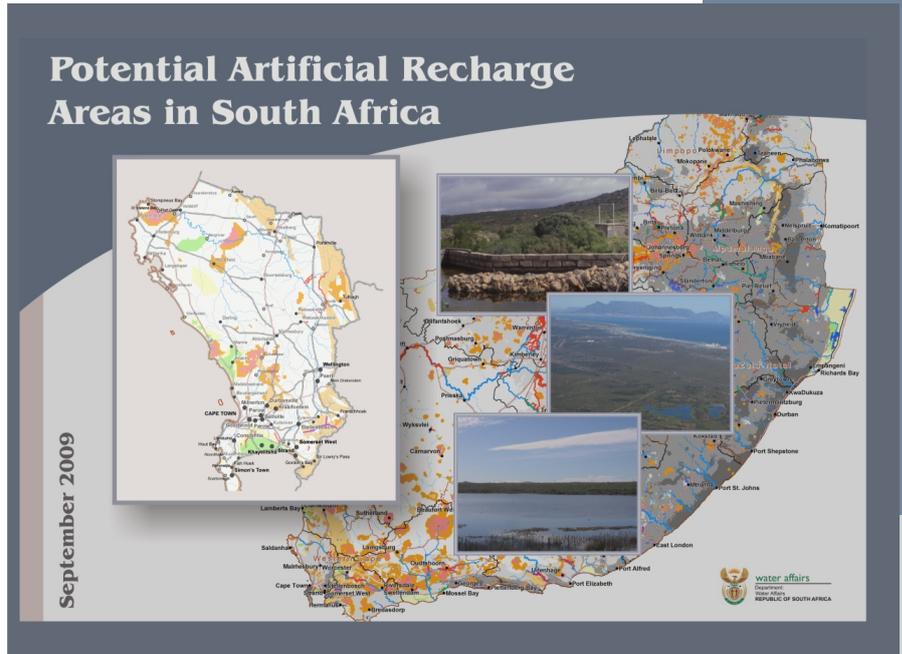


**A check-list for implementing successful artificial recharge projects** (DWA, 2009a): This brief report covers: Artificial recharge project stages; the Pre-feasibility study check list; and the Feasibility study check list (see the inside back cover of this booklet).

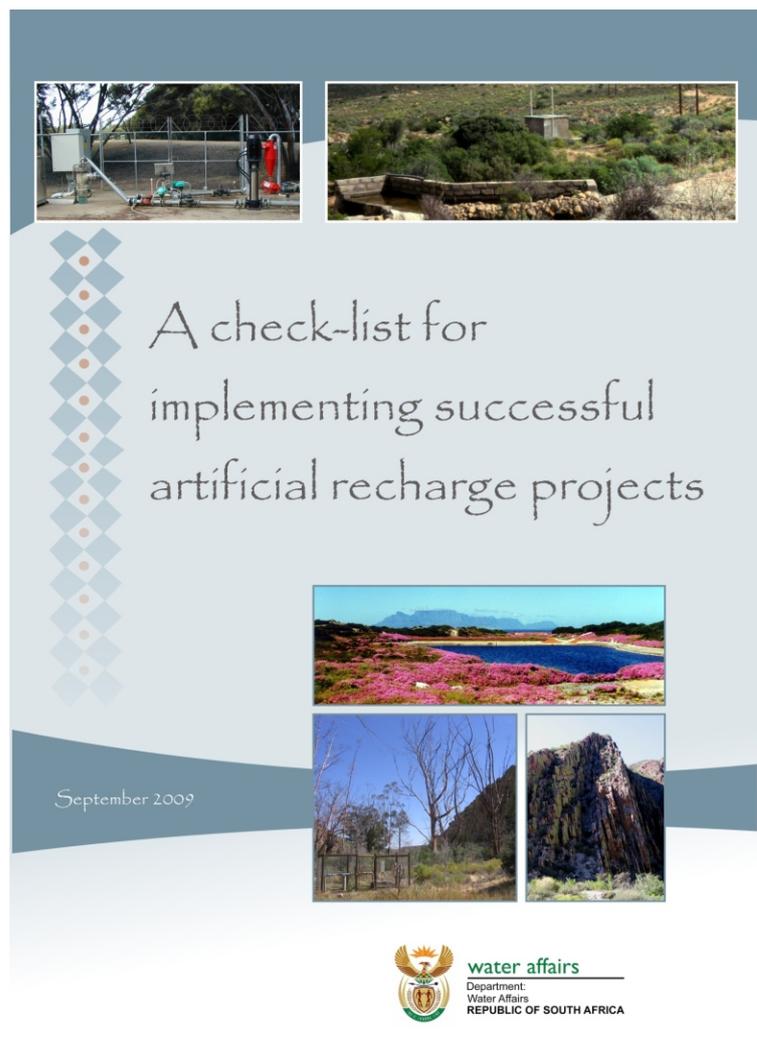



**The Atlantis Water Resource Management Scheme (DWA, 2010b):** This report describes the history, planning, implementation and operation of the Atlantis scheme which has been in operation for nearly 30 years.

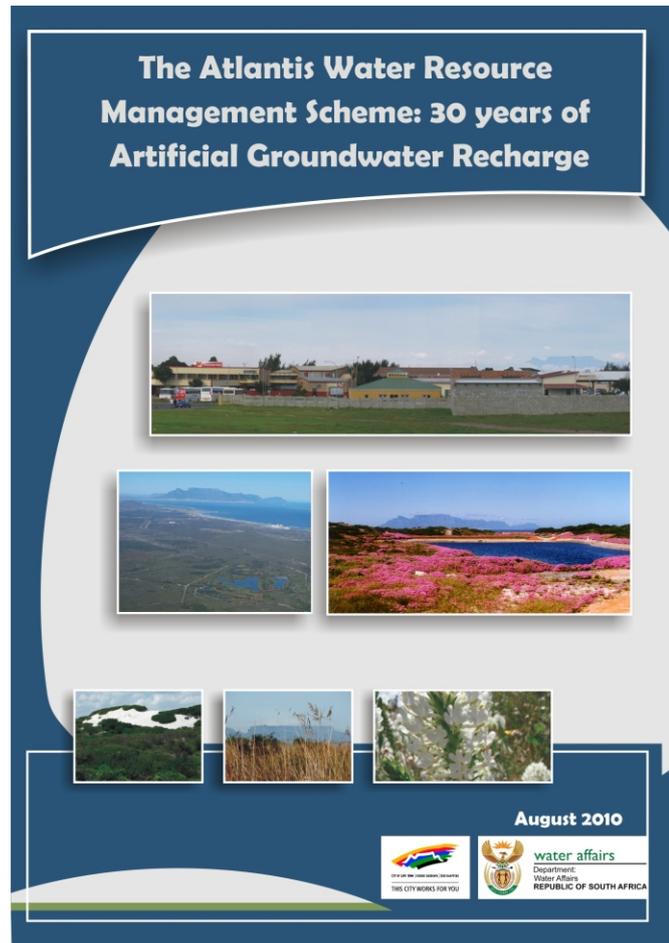

**Potential Artificial Recharge schemes: Planning for Implementation (DWA, 2010c):** This report presents different levels of feasibility studies for a number of potential artificial recharge projects.

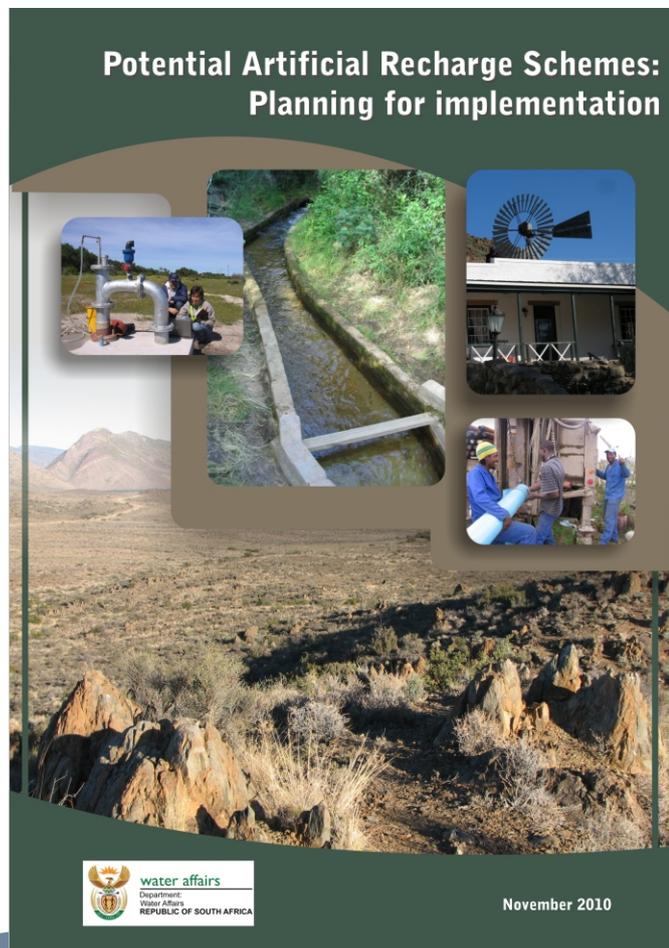

**Artificial Recharge lecture and lecture notes** (DWA, 2009c): A lecture with lecture notes has been prepared for academic institutions. The lecture covers all key points on artificial recharge.

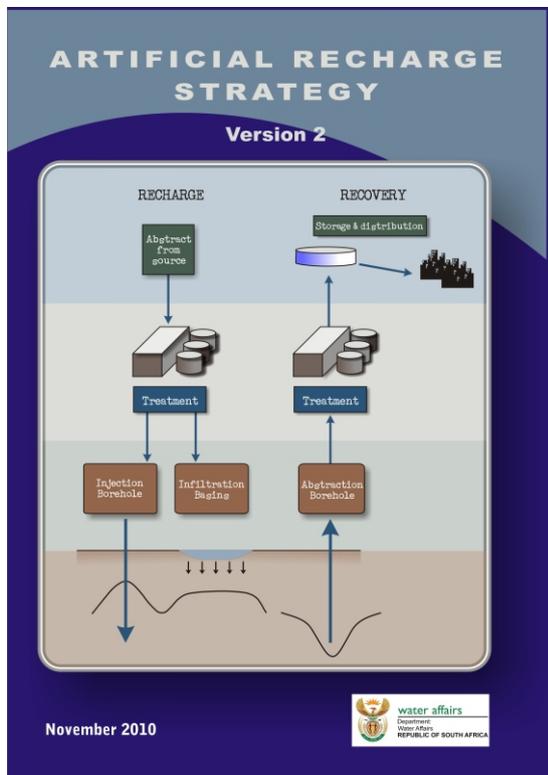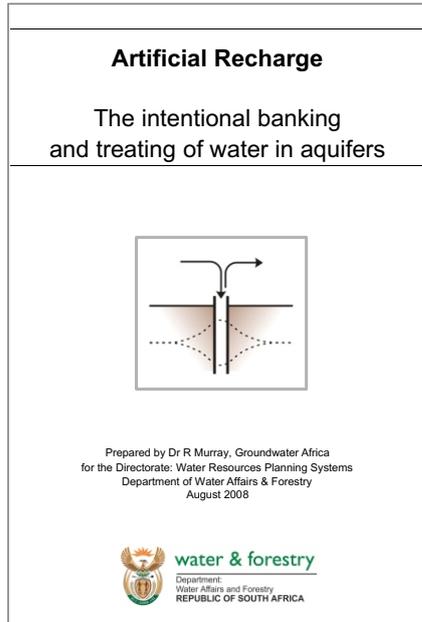

**Artificial Recharge Strategy Version 2** (DWA, 2010d): An update of the 2007 Artificial Recharge Strategy.

**Planning and Authorising Artificial Recharge Schemes** (DWA, 2010e): This brief report outlines project implementation stages, legal and regulatory issues and the authorisation process.



## 7. ACKNOWLEDGEMENTS

The authors would like to thank the municipalities from which the case studies were taken: City of Cape Town, Kamiesberg, Karoo Hoogland, Knysna, Overstrand and the City of Windhoek.

## 8. REFERENCES

- Borst L & Haas SA, 2006. Hydrology of Sand Storage Dams, A case study in the Kiindu catchment, Kitui District, Kenya. Vrije Universiteit, Amsterdam.
- Central Areas JV Consultants, 2004. Feasibility study on water augmentation to the Central Areas of Namibia. Volume 1. Report for NAMWATER.
- Department of Water Affairs, 2009a. Strategy and Guideline Development for National Groundwater Planning Requirements. *A check-list for implementing successful artificial recharge projects*. PRSA 000/00/11609/2 - Activity 12 (AR02), dated September 2009. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2009b. Strategy and Guideline Development for National Groundwater Planning Requirements. *Potential Artificial Recharge Areas in South Africa*. PRSA 000/00/11609/1 - Activity 14 (AR04), dated September 2009. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2009c. *Lecture notes on artificial recharge*. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2010a. Strategy and Guideline Development for National Groundwater Planning Requirements. *Artificial Groundwater Recharge: Recent initiatives in Southern Africa*. P RSA 000/00/11609/9 - Activity 4 (AR01), dated January 2010. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2010b. Strategy and Guideline Development for National Groundwater Planning Requirements. *The Atlantis Water Resource Management Scheme: 30 years of Artificial Groundwater Recharge*. PRSA 000/00/11609/10 - Activity 17 (AR5.1), dated August 2010. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2010c. Strategy and Guideline Development for National Groundwater Planning Requirements. *Potential Artificial Recharge schemes: Planning for Implementation*. P RSA 000/00/13410, dated October 2010. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2010d. *Artificial Recharge Strategy: Version 2*. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs, 2010e. Strategy and Guideline Development for National Groundwater Planning Requirements. *Planning and Authorising Artificial Recharge Schemes*, dated November 2010. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Department of Water Affairs and Forestry, 2007. *Artificial Recharge Strategy: Version 1.3*. Available on [www.artificialrecharge.co.za](http://www.artificialrecharge.co.za)
- Murray EC, 2002. The Feasibility of Artificial Recharge to the Windhoek Aquifer. Unpublished PhD Thesis, University of Free State, South Africa.
- Murray R. 2004. Artificial Groundwater Recharge: Wise Water Management for Towns and Cities. Water Research Commission Report No TT 219/03.
- Murray EC and Tredoux G, 1998. Artificial Recharge: A Technology for Sustainable Water Resource Development. Water Research Commission Report No. 842/1/98, Pretoria. ISBN 1 86845 450 9.

Artificial recharge project stages, key activities and authorisation requirements

Project Stage	Key Activities	Authorisation requirements
<b>Pre-feasibility Stage</b>	Identify the potential AR project and describe the information currently available.	None
	Based on existing information, comment on the feasibility of the project.	
	Describe the work required for the Feasibility Stage and estimate the cost of undertaking the feasibility study.	
	Establish existing water use licence conditions and authorisation requirements from DWA.	
<b>Feasibility Stage</b>	If needed, obtain a water use licence and environmental authorisation for the recharge tests.	None, or a short-term water use licence for AR testing and possibly environmental authorisation for AR testing
	Conduct the feasibility study. This should include AR testing (eg injection tests, infiltration tests, pumping tests, water quality assessments, etc)	
	Develop a preliminary infrastructure design.	
	Identify the project implementation phases if a phased approach is necessary (eg starting small and expanding after successive recharge cycles).	
	Estimate the costs of the project.	
	Identify funding sources	
	Compile a detailed project implementation plan.	
<b>Implementation Stage</b>	Obtain the necessary water use licence and environmental authorisation for the AR scheme.	Water use licence and possibly environmental authorisation
	Drilling and testing new injection and abstraction boreholes or infiltration basins	
	Set up the groundwater and recharge water monitoring system	
	Develop the detailed infrastructure design, carry out the tendering processes, and construct the project.	
	Compile monitoring, operation & maintenance procedures.	
<b>Operation and Maintenance Stage</b>	Carry out performance monitoring during production.	Compliance monitoring and reporting.
	Modify operation & maintenance procedures based on scheme performance.	
	Develop final monitoring and reporting system.	

